BORE-MAX
A VANTAGE Company

ELEVATOR SURVEY
REPLACEMENT JACK

DIMENSIONAL INFORMATION

A. FLOOR RISE
B. TOTAL TOP OVERTRAVEL
C. TOTAL BOTTOM OVERTRAVEL
D. PIT DEPTH
E. PLATFORM + BOLSTER + PLATEN
F. TOP OF HEAD TO FLOOR
G. PIT CHANNELS
H. OUTLET TO FLOOR - DIRECTION
I. OUTLET SIZE - TYPE
J. BOTTOM RUNBY TO SPRINGS
K. SPRING STROKE
L. SPRING HEIGHT
M. PLATFORM + BOLSTER + SPRING STRIKE.
N. PISTON O.D.
O. CYLINDER O.D.
P. DISTANCE BETWEEN GUIDES

NOTES: PIT DIMENSIONS ARE WITH THE PISTON BOTTOMED OUT.
TOP OVERTRAVEL IS WITH PISTON ON THE STOP RING

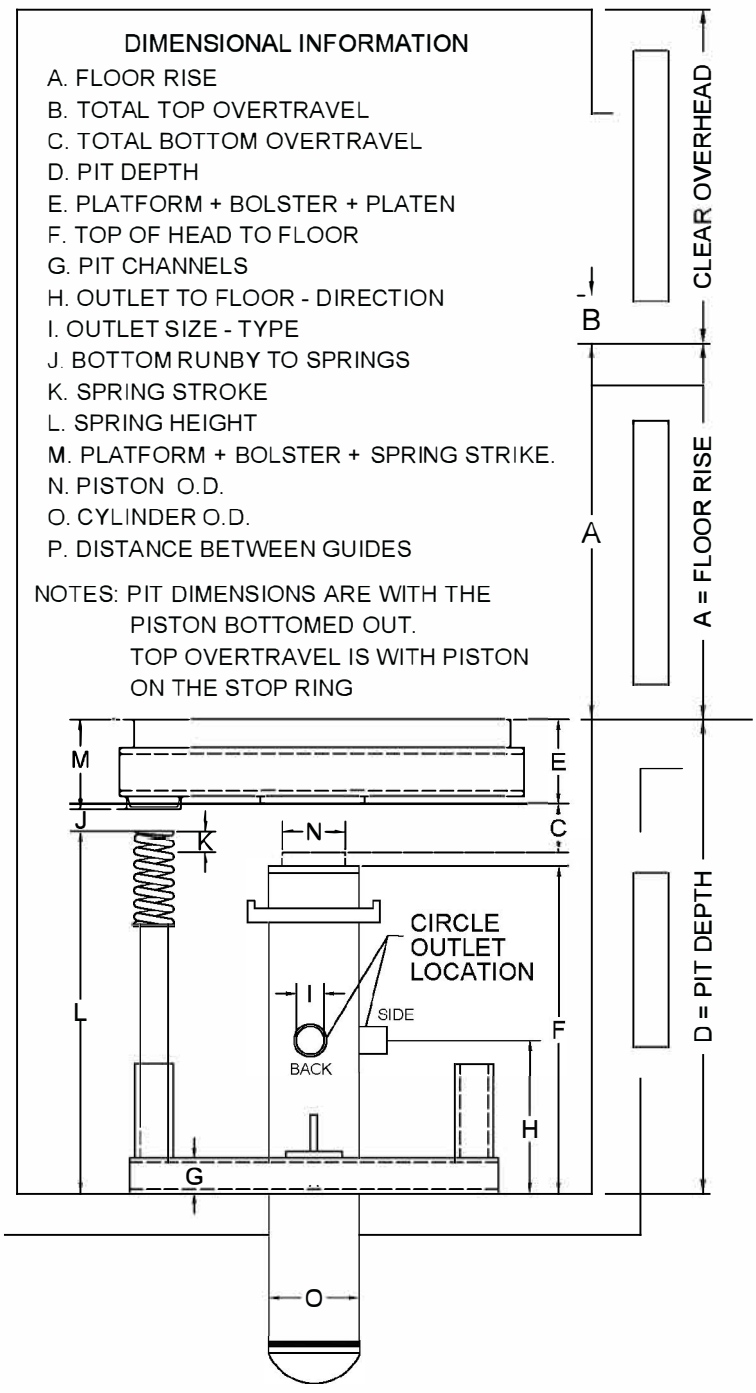

☐ PIPE RUPTURE VALVE REQ
☐ BALL VALVE - QTY._____

* REQUIRED FOR ESTIMATE ONLY

DATE:
COMPANY:
CONTACT:
PHONE:
EMAIL:
* JOB:
* CAPACITY:
* CAR WEIGHT:
* CAR SPEED:
* NO. OF SECTIONS:

* A: FLOOR RISE
B: TOP OVERTRAVEL TO STOP RING
C: BOTTOM OVERTRAVEL BOTTOMED OUT
* D: PIT DEPTH
E: TOP OF PLATFORM TO BOTTOM OF PLATEN
F: TOP OF HEAD TO PIT FLOOR
G: PIT CHANNELS
H: OUTLET TO FLOOR BACK ☐ ORSIDE ☐
I: OUTLET SIZE VIC ☐ OR NPT ☐
J: BOTTOM RUNBY TO SPRINGS
K: SPRING STROKE
L: SPRING HEIGHT TO PIT FLOOR
M: TOP OF PLATFORM TO SPRING STRIKE
* N: PISTON OD
O: CYLINDER ID / OD
P: DBG

3380 GILMAN ROAD | EL MONTE, CA USA 91732 | PH: 626.443.8647 | INFO@BORE-MAX.COM | WWW.BORE-MAX.COM