

Dry Pump

Hydraulic Pump Unit

DURABILITY. PERFORMANCE. QUALITY.


Built to last and run quietly

BENEFITS

- Built to withstand decades of thermal expansion and contraction
- Design conforms to Consultant, Universities, Hospitals, and Federal requirements
- Blow-out proof muffler design eliminates need for future service
- Multiple tank sizes available
- Isolation of key components using elastomer polymer materials makes it extremely quiet

STANDARD FEATURES

- Hinged reservoir lid
- Structural angle frame and foot angles are Seismic Zone 4 compliant
- Jack bolt motor/ belt adjustment and tension system
- Tank/Suction Line and Valve Return Line Shut-Off Valve
- Protected Tank Breather Vent
- Tank construction features 12 ga. Tank Walls, reinforced with structural materials
- Motor/Pump Plate rated for compressive vibratory loads is isolated with Elastomer Polymer materials
- Elastomer Polymer continuous length isolation footpads
- Reinforced expanded metal Sheave Guard
- Dry Pump motors rated at 80 Starts Per Hour Motor
- Oil Level Sight Gauge
- Test Port Shut-off Valve (1/8 in. NPT male-to-male) 15-100 HP, 3-Phase
- Bore-Max 8.0 in."Blow-Out Proof " mufflers require no future service
- Convenient Outlet Placement : Left-hand, Right-hand, Front or Rear Locations
- Schedule 80 Pressure Piping
- Return Line Diffuser
- Drip Pan

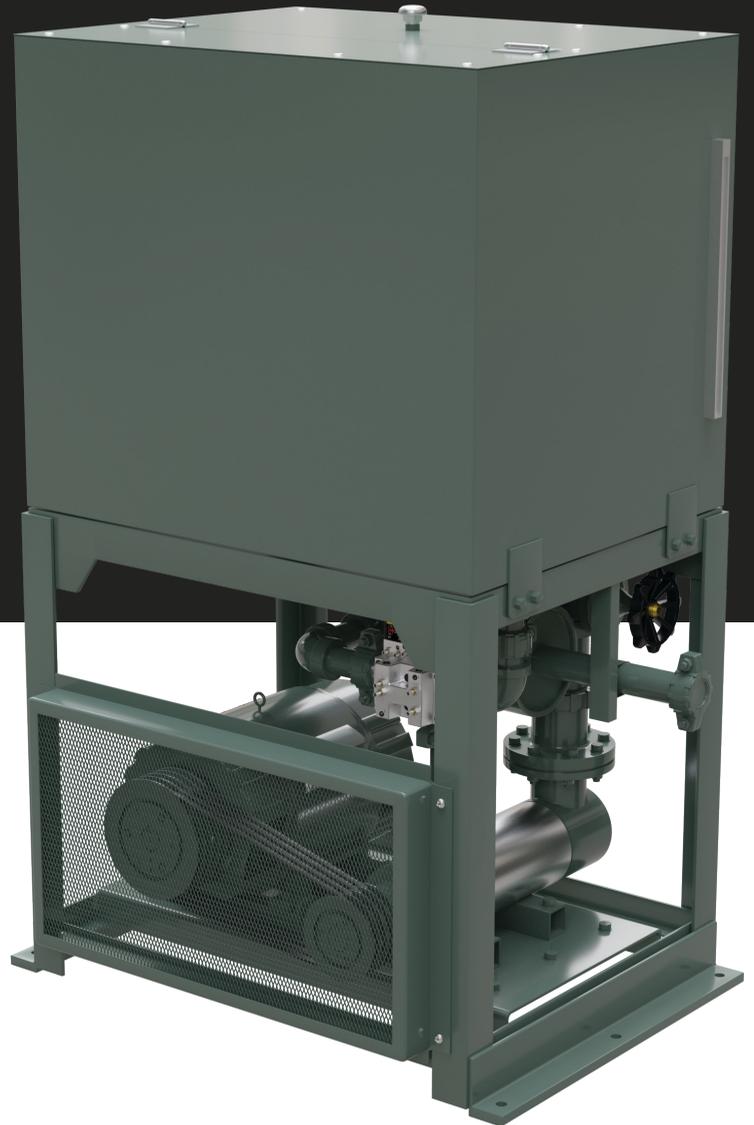


OPTIONAL FEATURES

- Variety of custom Tank sizes and designs available as well as Tandem, Triple and Quad configurations
- Pump Unit Shut-off Valve, Low Oil Switch, Low Pressure Switch (required if Jack Head is above the Pump Unit) and Pressure Gauge
- 120 Starts Per Hour Motors up to 75 HP
- Pneumatically charged Muffler
- 3/4 Tank Drain with Shut-off Valve
- Controller mounting to front of Pump Unit Tank
- Tank Heater (Automatic or Adjustable)
- Prepared for Oil Cooler
- Down Speed regulated Valve
- Overspeed/Pit Rupture Valve
- Junction Boxes
- Noise absorption panels
- OSHPD Certified Elastomer Polymer Isolation / Restraints

TANK SIZES

42.0 in. (W) x 33.0 in. (D) x 36.0 in. (H)	172 Gal
48.0 in. (W) x 33.0 in. (D) x 36.0 in. (H)	196 Gal

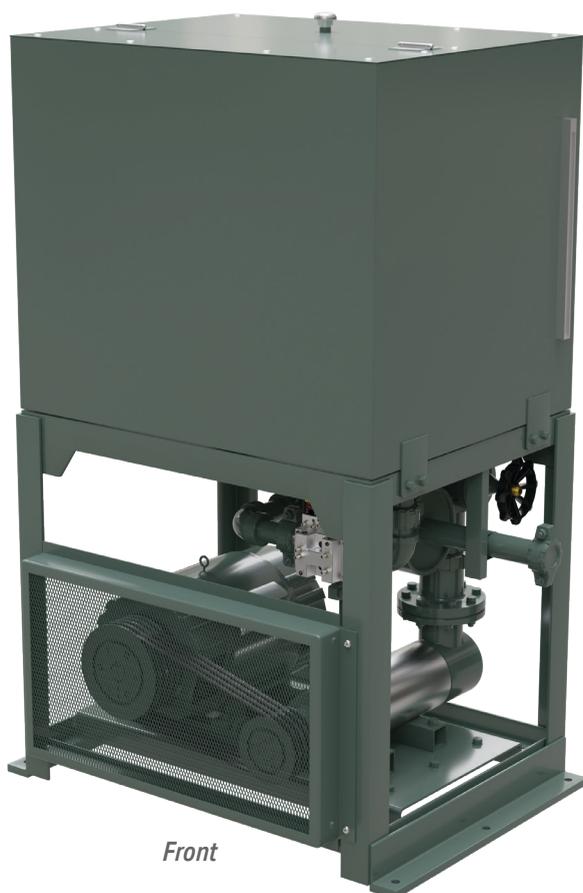

Front



Reverse



3380 Gilman Road
El Monte, CA 91732
Ph: 626.443.8616
Fax: 626.443.8647

info@bore-max.com
www.bore-max.com
sales@vantageelevation.com
www.vantageelevation.com



Chicago 877.300.5830
New York 347.226.4555
Miami 877.241.9354
L.A. 877.300.5816
Toronto 888.425.2262